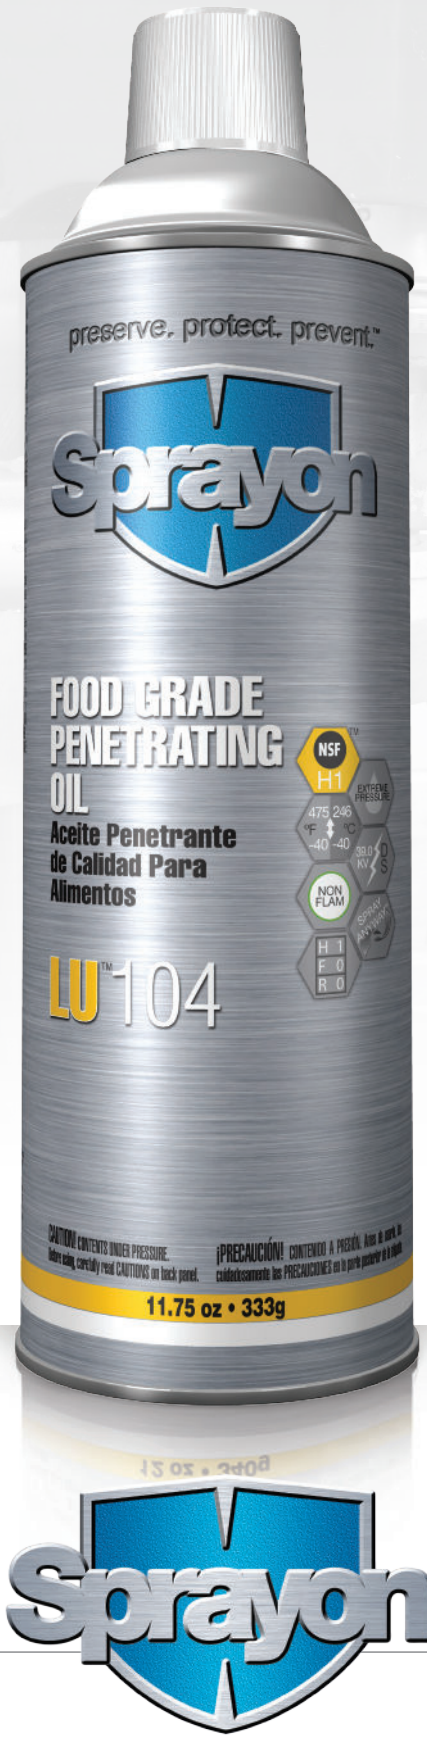


FOOD GRADE PENETRATING OIL

LU™104

- NSF® Nonfood Compounds Program Listed H1 Rated (Registration # 145288)
- For use in extreme pressure applications
- Minimum - Maximum operational temperature range: Low -40˚F (-40˚C) • High 475˚F (246˚C)
- Dielectric Strength Value: 39,000 volts
- Non-Flammable
- Features SPRAY ANYWAY™ Nozzle
- HMIS Hazard Rating: Health (1) • Flammability (0) • Reactivity (0)

- Quick penetration
- Non-flammable
- Use to loosen rust, scale & corrosion

Sprayon™

PRESERVE. PROTECT. PREVENT.®

Sprayon® LU™104 Food Grade Penetrating Oil is a synthetic heavy-duty rust penetrant that quickly penetrates nuts and bolts. Its accelerated action loosens rust while penetrating grease, dirt and corrosion. Specifically developed to meet the demands of a safe, low HMIS rating, non-flammable lubricant for food processing areas, LU™104 Food Grade Penetrating Oil can be used to loosen rust, scale and corrosion around fasteners and hose fittings on food processing equipment.

LUBRICANTS

FOR USE ON
- Rusted or Frozen Lugs
- Bolts • Repair Work
- Food Plant Equipment
- Tight-Fitting Parts
- General Overhaul
- Scales • Fans • Carts
- Galleys • Bottlers • Chutes
- Conveyors • Racks
- Ovens • Stoves • Fillers
- Mixers • Freezers • Rails
- Cooking Appliances

FOR USE BY
- Bakeries • Bottlers
- Breweries • Canneries
- Dairies • Egg Processors
- Meat & Poultry Processors





LU104

APPLICATION
Shake well before using. For best results use at room temperature 70˚F. Spray in a well ventilated area away from open flame. Apply a thin film and allow to soak in. Only use necessary amount to achieve desired results. Wipe off excess with clean cloth.

PERFORMANCE
PLASTIC SAFE: Yes (Always test before using)
TEMPERATURE RANGE:
HIGH: 475 ˚F
LOW: -40 ˚F
LOAD CAPACITY: Extreme
DIELECTRIC STRENGTH: 39.0 kV
FALEX LOAD (ASTM D-3233A): 3,000 lbs.
DELIVERY: SPRAY ANYWAY™ Nozzle

PROPERTIES
APPEARANCE: Clear
BASE: Synthetic
FILM TYPE: Wet
ODOR: Low
CONTAINS P.T.F.E: No
PROPELLANT: CO_2
WT./GAL.: 6.67
SPECIFIC GRAVITY: 0.80
% VOC AEROSOL: 0
V.O.C. COMPLIANT CALIFORNIA: Yes
V.O.C. COMPLIANT OTC STATES: Yes
HEAVY METALS: No
FLAMMABLE: No
FLASH POINT: >200°F
SARA 313: None
PROP 65: None
HAPS: None
HAZARD RATING: 1, 0, 0
SHELF LIFE: 3 years from date of manufacture

PACKAGING
STOCK #: S00104000
UPC CODE: 0-75577-00617-5
FILL WT.: 11.75 oz.
PER CASE: 12
CARTON DIMENSIONS:
L 11.13” x W 8.44” x H 9.94”

SHIPPING
Refer to section 14 of the material safety data sheet for proper transport information and labeling.

RESOURCES
MSDS/EDS/PRODUCT DATA SHEETS: Sprayon.com
CUSTOMER SERVICE: 800-777-2966
TECHNICAL INFORMATION: 800-251-2486

NSF® NONFOOD COMPOUNDS PROGRAM LISTED
H1 Rated - Registration #145288

This product is acceptable as a lubricant with incidental food contact (H1) for use in and around food processing areas.

Scan this code with your mobile phone to download the NSF® Registration Letter for this product

© 2012 Sprayon® Products Made in U.S.A.

Distributed by:

PRESERVE. PROTECT. PREVENT.®

Sprayon® Products
101 Prospect Ave. NW
Cleveland, OH 44115
Sprayon.com
800-777-2966